

Кухонное оборудование, снятое с производства

Виды товаров: машины для приготовления чешуйчатого льда, ледогенераторы, пластиковые ковши, контейнеры для льда, ледогенераторы, охладители для бара, холодильники, чаши блендера, соковыжималки, эспрессо-машины, наливные пивоварни, водонагреватели, кофемашины, машины для приготовления кофе в зернах, холодильное оборудование, мини-бары, грили, коптильни, комбинированные печи, сушилки, блинницы, плиты, кебаб-грили, Тележки для транспортировки продуктов, холодные витрины, тележки для биомусора, лампы принадлежности, диспенсеры-тележки для посуды, мясорубки, керамические плиты, тележки для холодных блюд, мармиты и др.

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mhi@nt-rt.ru || сайт: <http://metos.nt-rt.ru/>



CODE: MG4131472-Z24001

Ice flake machine Metos G 280A HC

Full description Technical specifications

Flake ice machine. Air cooled

- stainless steel construction

Standard accessories (included in the offered price)

- water hose

- drain hose

Extra accessories (will be charged separately)

- ice bin

- ice trolley

GENERAL

Description

Ice flake machine Metos G 280A HC

DIMENSIONS AND CAPACITY

Product capacity

280 kg/day

Item width mm

560

Item depth mm

569

DIMENSIONS AND CAPACITY

Item height mm	695
Package volume	0.384 m3
Package dimensions (LxWxH)	65x65x91 cm
Net weight	83 kg
Package weight	93 kg

TECHNICAL INFORMATION

Connection power kW	1.05
Fuse Size A	10
Connection voltage V	230
Number of phases	1N
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	290
Cold water diam.	R3/4"
Cold water min pressure kPa	100
Cold water max pressure kPa	600
Cold water conn. height mm	130
Drain diameter	24
Drain conn. inlet	Behind
Drain conn. height mm	65
Floor drain needed	Yes
Type of the refrigerant	R290



CODE: MG4131486-Z24001

Granular Ice Flaker Metos G280W HC

Full description Technical specifications

Flake ice machine. Water cooled

- stainless steel construction Standard accessories (included in the offered price)
- water hose
- drain hose Extra accessories (will be charged separately)
- ice bin
- ice trolley

GENERAL

Description

Granular Ice Flaker Metos G280W HC

DIMENSIONS AND CAPACITY

Product capacity

280 kg/day

Item width mm

560

Item depth mm

569

Item height mm

695

Package volume

0.379 m3

Package dimensions (LxWxH)

64.5x64.5x91 cm

Net weight

83 kg

DIMENSIONS AND CAPACITY

Package weight	93 kg
----------------	-------

TECHNICAL INFORMATION

Connection power kW	1.05
Fuse Size A	10
Connection voltage V	220-240
Number of phases	1N
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	290
Cold water diam.	3/4"
Cold water min pressure kPa	100
Cold water max pressure kPa	600
Cold water conn. height mm	130
Drain diameter	24
Drain conn. height mm	65
Floor drain needed	Yes
Type of the refrigerant	R290



CODE: MG4171983-Z24001

Plastic showel Metos Pala

Technical specifications

GENERAL

Description	Plastic showel Metos Pala
-------------	---------------------------

DIMENSIONS AND CAPACITY

Item width mm	100
---------------	-----

Item depth mm	1200
---------------	------

Item height mm	20
----------------	----

Package volume	0.016 m3
----------------	----------

Package dimensions (LxWxH)	120x10x2 cm
----------------------------	-------------

Net weight	1 kg
------------	------

Package weight	1 kg
----------------	------



CODE: MG4171905-Z24001

Ice bin Metos B350-G160/280/510

Stainless steel construction. Insulation 40-50 mm

Full description Technical specifications

Stainless steel construction. Insulation 40-50 mm

- drain connection Standard accessories (included in the offered price)

- drain hose

GENERAL

Description

Ice bin Metos B350-G160/280/510

DIMENSIONS AND CAPACITY

Product capacity	350 kg of ice
Item width mm	1250
Item depth mm	790
Item height mm	1000/1100
Package volume	1.304 m3
Package dimensions (LxWxH)	130x85x118 cm
Net weight	105 kg
Package weight	126 kg

TECHNICAL INFORMATION

Drain diameter	3/4"
Floor drain needed	Yes



CODE: MG4162067-Z24001

Ice cube machine Metos VM 900A with R452A

Cube size 7 gr. Cell evaporator

Full description Technical specifications

Cube size 7 gr. Cell evaporator

- air condenser
- stainless steel construction Standard accessories (included in the offered price)
- water hose
- drain hose Extra accessories (will be charged separately)
- ice bin
- ice trolley

GENERAL

Description

Ice cube machine Metos VM 900A with R452A

DIMENSIONS AND CAPACITY

Product capacity

400 kg/day

Item width mm

770

Item depth mm

550

Item height mm

805

Package volume

0.491 m3

Package dimensions (LxWxH)

81.5x61.5x98 cm

DIMENSIONS AND CAPACITY

Net weight	113 kg
Package weight	124 kg

TECHNICAL INFORMATION

Connection power kW	3
Fuse Size A	32
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	323
Cold water diam.	R3/4"
Cold water min pressure kPa	400
Cold water conn. height mm	252
Drain diameter	24
Drain conn. height mm	40
Floor drain needed	Yes
Type of the refrigerant	R452A



CODE: MG4162067-Z24001

Ice cube machine Metos VM 900A with R452A

Cube size 7 gr. Cell evaporator

Full description Technical specifications

Cube size 7 gr. Cell evaporator

- air condenser
- stainless steel construction Standard accessories (included in the offered price)
- water hose
- drain hose Extra accessories (will be charged separately)
- ice bin
- ice trolley

GENERAL

Description	Ice cube machine Metos VM 900A with R452A
-------------	---

DIMENSIONS AND CAPACITY

Product capacity	400 kg/day
Item width mm	770
Item depth mm	550
Item height mm	805
Package volume	0.491 m3
Package dimensions (LxWxH)	81.5x61.5x98 cm
Net weight	113 kg
Package weight	124 kg

TECHNICAL INFORMATION

Connection power kW	3
Fuse Size A	32
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	323
Cold water diam.	R3/4"
Cold water min pressure kPa	400
Cold water conn. height mm	252
Drain diameter	24
Drain conn. height mm	40
Floor drain needed	Yes
Type of the refrigerant	R452A



CODE: MG4132406-Z24001

Glass door cooler Metos Maxiglass MG3/150LG left-handed

The Metos Maxiglass MG3/150LG glass door cooler is mainly designed to display bottled drinks and beverage containers in an aesthetically pleasing manner as well...

Full description Technical specifications

The Metos Maxiglass MG3/150LG glass door cooler is mainly designed to display bottled drinks and beverage containers in an aesthetically pleasing manner as well as the preservation of various drinks at a suitable temperature. Enhanced technology and unit components make the cooler more energy efficient and therefore more environmentally friendly without having to make any compromises in the appearance of the unit or its cooling capacity.

The cooler has a capacity of 150 litres and holds 143 0.33 l bottles. Effective and energy-efficient fans ensure the uniform and quick circulation of cold air in the entire cooler. Refrigerant R600a used is environmentally friendly. Cooler temperature can be adjusted between +2°C...+18°C (factory setting +6°C). Temperature regulation and indicator are located on the exterior surface of the cooler. Left-hand glass door frame and kick plate are anthracite, the exterior of the unit is comprised of an anthracite and steel lining.

The Metos Maxiglass MG3/150LG glass door cooler has two adjustable flat shelves. LED lighting provides bright and uniform lighting and temptingly accentuates the drinks. The lighting has a separate switch. When the lighting is switched off, the cooler will continue to be cooled.

Smooth surfaces and removable flat shelves and shelf carriers simplify the cleaning of the unit. The cooler has rapid automated defrost function, featuring evaporation of defrost water. The door has a lock and can be opened easily, handle along the length of the door.

- left-hand door
- capacity 143/0.33 l (Ø60 mm) bottles
- volume 150 litres
- the temperature can be regulated between +2°C...+18°C
- two adjustable flat shelves
- door lock
- LED-lighting
- door frame and kick plate are anthracite, the exterior is comprised of an anthracite and steel lining.
- replaceable door seals
- automated defrost and defrost water evaporation
- electronic thermostat
- refrigerant R600a

SUPPLIED SET INCLUDES:

- two flat shelves

GENERAL

Description

Glass door cooler Metos Maxiglass MG3/150LG
left-handed

DIMENSIONS AND CAPACITY

Product capacity	143x33 cl btl, net 150 L
Item width mm	600
Item depth mm	576
Item height mm	900/910
Package volume	0.435 m3
Package dimensions (LxWxH)	61.4x101x70.2 cm
Net weight	65 kg
Package weight	69 kg

TECHNICAL INFORMATION

Connection power kW	0.095
Fuse Size A	6

TECHNICAL INFORMATION

Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50/60
Protection rating (IP)	21
Type of electrical connection	Plug
Electrical conn. height mm	50
Type of the refrigerant	R600a
Quantity of refrigerant g	65
Sound level dB	48

ENERGY AND CONSUMPTION

Daily power cons. kWh	1.58
-----------------------	------



CODE: MG4162285-Z24001

Back bar cooler Metos DB200S with double glazed tempered glass sliding doors.

Full description Technical specifications Attachments

Back bar cooler Metos DB200S with double glazed tempered glass sliding doors.

- temperature : +2...+10°C
- internal dimensions 810 x 345 x 720 mm
- 2 pcs sliding glass doors, self-closing
- inner LED light
- 4 wire shelves white
- exterior finish black
- interior finish Stucco aluminium
- 4 adjustable feet
- ventilated cooling
- automatic defrost
- electronic controller
- lock

GENERAL

Description

DIMENSIONS AND CAPACITY

Product capacity	191 liters
Item width mm	900

DIMENSIONS AND CAPACITY

Item depth mm	515
Item height mm	870
Net volume l	183 liters
Package volume	0.57 m3
Package dimensions (LxWxH)	100x60x95 cm
Net weight	65 kg
Package weight	70 kg

TECHNICAL INFORMATION

Connection power kW	0.175
Connection voltage V	220-240
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Type of the refrigerant	R600a
Quantity of refrigerant g	70
Sound level dB	45

ENERGY AND CONSUMPTION

Daily power cons. kWh	2.5
Annual power cons. kWh	913



CODE: MG4132407-Z24001

Glass door cooler Metos Maxiglass MG3/150RGCS right-handed

The Metos Maxiglass MG3/150RGCS glass door cooler is mainly designed to display bottled drinks and beverage containers in an aesthetically pleasing manner as we...

Full description Technical specifications

The Metos Maxiglass MG3/150RGCS glass door cooler is mainly designed to display bottled drinks and beverage containers in an aesthetically pleasing manner as well as the preservation of various drinks at a suitable temperature. Enhanced technology and unit components make the cooler more energy efficient and therefore more environmentally friendly without having to make any compromises in the appearance of the unit or its cooling capacity.

The cooler has a capacity of 150 litres and holds 143 0.33 l bottles. Effective and energy-efficient fans ensure the uniform and quick circulation of cold air in the entire cooler. Refrigerant R600a used is environmentally friendly. Cooler temperature can be adjusted between +2°C...+18°C (factory setting +6°C). Temperature regulation and indicator are located on the exterior surface of the cooler. Right-hand glass door frame and guard plate are made of stainless steel, the exterior of the unit is an anthracite and steel lining.

The Metos Maxiglass Noverta MG3/150RGCS glass door cooler has two adjustable flat shelves. LED lighting provides bright and uniform lighting and temptingly accentuates the drinks. The lighting has a separate switch. When the lighting is switched off, the cooler will continue to be cooled.

Smooth surfaces and removable flat shelves and shelf carriers simplify the cleaning of the unit. The cooler has rapid automated defrost function, featuring evaporation of defrost water. The door has a lock.

- right-hand door
- capacity 143pcs/0.33 l (Ø60 mm) bottles
- volume 150 litres
- the temperature can be regulated between +2°C...+18°C
- two adjustable flat shelves
- door lock
- LED-lighting
- door frame and kick plate are stainless steel, the frame is anthracite and steel lining
- replaceable door seals
- automated defrost and defrost water evaporation
- electronic thermostat
- refrigerant R600a

SUPPLIED SET INCLUDES:

- two flat shelves

GENERAL

Description

Glass door cooler Metos Maxiglass MG3/150RGCS right-handed

DIMENSIONS AND CAPACITY

Product capacity	143x33 cl btl, net 150 L
Item width mm	600
Item depth mm	576
Item height mm	900/910
Package volume	0.435 m3
Package dimensions (LxWxH)	61.4x101x70.2 cm
Net weight	65 kg
Package weight	69 kg

TECHNICAL INFORMATION

Connection power kW	0.095
Fuse Size A	6
Connection voltage V	230
Number of phases	1NPE

TECHNICAL INFORMATION

Frequency Hz	50/60
Protection rating (IP)	21
Type of electrical connection	Plug
Electrical conn. height mm	50
Type of the refrigerant	R600a
Quantity of refrigerant g	65
Sound level dB	48

ENERGY AND CONSUMPTION

Daily power cons. kWh	1.58
-----------------------	------



CODE: MG4117091-Z22001

Shaker HMD400 230V1~ OUTLET

Three speeds operated by a rocker switch. Three separate spindles

Full description Technical specifications

Three speeds operated by a rocker switch. Three separate spindles

- heavy duty die cast construction
- included 3 pcs of 1,0 liter stainless steel cups

GENERAL

Description

Shaker HMD400 230V1~ OUTLET

DIMENSIONS AND CAPACITY

Product capacity	3 x 1 liters
Item width mm	318
Item depth mm	229
Item height mm	521
Package volume	0.045 m3
Package dimensions (LxWxH)	30x40x60 cm
Net weight	17.4 kg
Package weight	21 kg

TECHNICAL INFORMATION

Connection power kW	0.3
Fuse Size A	6
Connection voltage V	230

TECHNICAL INFORMATION

Number of phases	1N
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	20



CODE: MG4117180-Z24001

Fruit and vegetables juicer Metos Zummo Z22

Metos Zummo Z22 is a very quiet, fruit and vegetables juicer for demanding professional use. With the help of the device, you can instantly prepare fresh and ju...

Full description Technical specifications

Metos Zummo Z22 is a very quiet, fruit and vegetables juicer for demanding professional use. With the help of the device, you can instantly prepare fresh and juices either to be offered as such or as components of desserts.

The device works on the centrifugal principle, where a strong rotary motion detaches the juice from fruits and vegetables. The raw materials are dropped into the tank from the feed opening at the top. The device can be running at all times when adding raw materials, which allows the minute capacity to reach two liters of finished juice. The juicer is quick to assemble and, thanks to the detachable parts, it only takes five minutes to wash. The device is to be installed on a table top. The rubber feet on the bottom hold the device firmly in place. Thanks to the anti-vibration rubber supports and the quiet motor, the device is comfortable to use.

- parts easily removable for washing, the appliance takes about 5 minutes to clean
- inlet diameter 75 mm
- waste container 9 liters
- capacity 2 liters of juice per minute
- outer shell in aluminum and black plastic, juice bowl in stainless steel

GENERAL

Description

Fruit and vegetables juicer Metos Zummo Z22

DIMENSIONS AND CAPACITY

Product capacity	up to 2 litres/minute
Item width mm	438
Item depth mm	512
Item height mm	290
Package volume	0.074 m3
Package dimensions (LxWxH)	55x45x30 cm
Net weight	18.5 kg
Package weight	20 kg

TECHNICAL INFORMATION

Connection power kW	0.8
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Sound level dB	69

ENERGY AND CONSUMPTION

Daily power cons. kWh	0.275
-----------------------	-------



CODE: MG4157801-Z24001

One brewing unit and hot water tap. Suitable for medium restaurants, small hotels, convenience stores and coffee shops

Full description Technical specifications

One brewing unit and hot water tap. Suitable for medium restaurants, small hotels, convenience stores and coffee shops

- automatic water filling
- brewing volume 0,5 - 4,0 ltr
- brewing time 4-6 minutes / 4 liter
- can be used with 4 ltr termos dispensers
- simple to use digital control panel
- pre-wetting, pulse brew, brew time and brew volume programmable
- cascading spray dome(CSD), water flows over the outer surface instead of through tiny drain holes (competitor models) that can easily become clogged with mineral and scale over a short period of time. Because of its revolutionary design, the CSD completely eliminates spray head lime buildup - a leading reason for service calls. Fewer service calls means lower operating costs and more time producing revenue.
- filter paper holder
- descale indicator
- manual water faucet

Extra accessories: (will be charged separately)

- Luxus thermos dispenser L4S-10 (4 litres) or D041 (3 litres)
- serving station S4S-10-1 for Luxus L4S-10 dispenser
- filter paper F002

GENERAL

Description

DIMENSIONS AND CAPACITY

Product capacity	29 litres/hour
Item width mm	298
Item depth mm	518
Item height mm	667
Package volume	0.19 m3
Package dimensions (LxWxH)	44x56x77 cm
Net weight	13.2 kg
Package weight	19 kg

TECHNICAL INFORMATION

Connection power kW	2.2
Fuse Size A	16
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	181
Cold water diam.	3/4"
Cold water min pressure kPa	200
Cold water max pressure kPa	600
Cold water conn. inlet	Bottom,Behind,Left
Cold water conn. height mm	114



CODE: MG4157844-Z24001

Coffee brewer Metos CBS-1231 Plus with one brewing unit

Technical specifications

GENERAL

Description

Coffee brewer Metos CBS-1231 Plus with one brewing unit

DIMENSIONS AND CAPACITY

Product capacity

2 x 3-4 litres thermos

Item width mm

298

Item depth mm

384/521

Item height mm

664/700

Package volume

0.194 m3

Package dimensions (LxWxH)

45x56x77 cm

Net weight

13.2 kg

Package weight

18.6 kg

TECHNICAL INFORMATION

Connection power kW

2.8

TECHNICAL INFORMATION

Fuse Size A	13
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Semifixed
Electrical conn. height mm	181
Remarks (electrical)	CEE 7/7
Cold water diam.	3/8" male
Cold water flow l/min	5
Cold water min pressure kPa	138
Cold water max pressure kPa	517
Cold water conn. inlet	Bottom,Behind
Cold water conn. height mm	129



CODE: MG4136206-Z24001

Coffee machine Metos Cafina XT6-1G-0-WA-0-0

Fully automatic coffee machine for coffee specialties. Self service model

Full description Technical specifications

Fully automatic coffee machine for coffee specialties. Self service model

- new, innovative design
- TFT 8,4" touch display
- lightning concept
- height adjustable dispenser
- innovative milk system with cold milk foam
- professional stainless steel brewing group
- variable pressure system
- tool steel grinding disks
- automatic coffee quality system (ACS)
- cleaning in place (CIP)

GENERAL

Description

Coffee machine Metos Cafina XT6-1G-0-WA-0-0

DIMENSIONS AND CAPACITY

Product capacity

170 espresso, 130 cappuccino

Item width mm

300

Item depth mm

580

Item height mm

715

Package volume

0.208 m3

DIMENSIONS AND CAPACITY

Package dimensions (LxWxH)	40x65x80 cm
Net weight	50.8 kg
Package weight	65 kg

TECHNICAL INFORMATION

Connection power kW	3
Fuse Size A	16
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50/60
Electrical cable length mm	1800
Type of electrical connection	Semifixed
Electrical conn. height mm	25

792

Package volume	0.23 m3
Package dimensions (LxWxH)	45x60x85 cm
Net weight	39 kg
Package weight	45 kg

TECHNICAL INFORMATION

Connection power kW	2.275
Fuse Size A	16
Connection voltage V	220-240

TECHNICAL INFORMATION

Number of phases	1N
Frequency Hz	50/60
Protection rating (IP)	X3
Type of electrical connection	Semifixed
Electrical conn. height mm	25
Cold water diam.	3/4"
Cold water min pressure kPa	400
Cold water conn. height mm	25
Sound level dB	65

ENERGY AND CONSUMPTION

Energy index	A+
--------------	----



CODE: MG4321070S-Z24001

Lockable cold drawer Metos Classic BA800-BO2-MPL

Two cold drawers for bottles and cans. Bar worktop with a spout for bottles and a sink(with drain) for ice

Full description Technical specifications

Two cold drawers for bottles and cans. Bar worktop with a spout for bottles and a sink(with drain) for ice

- drawers with central locking
- overextending telescopic slides, can be removed for cleaning
- stainless steel construction with rounded topplate
- urethane foamed good insulation
- effective and removable compressor cassette
- the econdenser is easy to clean
- temperature area: +3° - +10 °C with electronic thermostat
- ergonomic handles made of special plastic, easy to clean
- hygienic rounded edges inside cabinet
- adjustable feet +20/-45 mm



CODE: MG4162266-Z24001

Storage chiller Metos UR550S new design

Electronic thermostat. Temperature range 2°C to 10°C

Full description Technical specifications

Electronic thermostat. Temperature range 2°C to 10°C

- fan assisted cooling
- automatic defrosting
- stainless steel cabinet
- reversible solid door
- lock
- 4 wire shelves white
- 2 adjustable feet, 2 rollers

GENERAL

Description	Storage chiller Metos UR550S new design
-------------	---

DIMENSIONS AND CAPACITY

Product capacity	461/420 L
Item width mm	770
Item depth mm	722
Item height mm	1702
Net volume l	420 L
Package volume	1.237 m3
Package dimensions (LxWxH)	77x85x189 cm
Net weight	90 kg
Package weight	97 kg

TECHNICAL INFORMATION

Connection power kW	0.13
Connection voltage V	220-240
Number of phases	1NPE
Frequency Hz	50
Remarks (electrical)	Climate class 4
Type of the refrigerant	R600a
Quantity of refrigerant g	95
Sound level dB	45

ENERGY AND CONSUMPTION

Energy class rating	C
Daily power cons. kWh	1.7
Annual power cons. kWh	621



CODE: MG4116867-Z24001

Display cooler Metos UR200SG with glass door (New design)

Electronic thermostat. Temperature range 2°C to 10°C

Full description Technical specifications

Electronic thermostat. Temperature range 2°C to 10°C

- fan assisted cooling
- automatic defrosting
- stainless steel exterior
- white ABS interior
- reversible hinged glass door
- lock
- 3 wire shelves white
- 2 adjustable feet, 2 rollers
- LED interior light
- capacity 112 pcs 330ml cans

GENERAL

Description

Display cooler Metos UR200SG with glass door (New design)

DIMENSIONS AND CAPACITY

Product capacity	Volume 130 L
Item width mm	600
Item depth mm	585
Item height mm	855
Net volume l	Volume net 119 L
Package volume	0.408 m3

DIMENSIONS AND CAPACITY

Package dimensions (LxWxH)	69x65x91 cm
Net weight	44 kg
Package weight	49 kg

TECHNICAL INFORMATION

Connection power kW	0.13
Connection voltage V	220-240
Number of phases	1NPE
Frequency Hz	50
Remarks (electrical)	Climate class 4
Type of the refrigerant	R600a
Quantity of refrigerant g	35
Sound level dB	40

ENERGY AND CONSUMPTION

Energy class rating	B
Daily power cons. kWh	1.6
Annual power cons. kWh	584



CODE: MG4171918-Z24001

Ice pebble machine Metos TM 250A HC

Ice pebble machine Metos TM 250A HC with pebble ice daily production up to 245kg.

Full description Technical specifications

Ice pebble machine Metos TM 250A HC with pebble ice daily production up to 245kg.

- stainless steel construction
- Rock ice - 91% dry
- 1 l (water) - 1 kg (ice)
- removable and cleanable air filter
- air cooling system
- easy-to-clean rounded inner surfaces
- dustproof water basin
- electromechanical operation
- ON-OFF rocker switch
- tropical category +43°C
- HFC-free
- ice pebble size approx. 13x18x13 mm
- without bin

Suitable bins (not included in the offered price) / Bin 240PE / Bin 110 / Bin 200 / Bin 350 / Roller Bin 100 / Double Roller Bin 100

GENERAL

Description

Ice pebble machine Metos TM 250A HC

DIMENSIONS AND CAPACITY

Product capacity

245 kg/24 hour

Item width mm

560

Item depth mm

569

Item height mm

695

Package volume

0.384 m3

DIMENSIONS AND CAPACITY

Package dimensions (LxWxH)	65x65x91 cm
Net weight	83 kg
Package weight	93 kg

TECHNICAL INFORMATION

Connection power kW	1.05
Fuse Size A	10
Connection voltage V	230
Number of phases	1N
Frequency Hz	50
Type of electrical connection	Plug
Cold water diam.	3/4"
Cold water min pressure kPa	100
Cold water max pressure kPa	600
Drain diameter	24
Type of the refrigerant	R290



CODE: MG4321002-Z20002

Kylmävetolaatikosto FT1200x750-GN3

Cold drawer with solid insulated work top. For 7 x GN 1/1 -150 mm (not included)

Full description Technical specifications

Cold drawer with solid insulated work top. For 7 x GN 1/1 -150 mm (not included)

- overextending telescopic slides, can be removed for cleaning
- stainless steel construction with rounded topplate
- urethane foamed good insulation
- effective and removable compressor cassette
- easy to clean condenser
- temperature area: +3° - +10 °C with electronic thermostat
- ergonomic handles made of special plastic, easy to clean
- hygienic rounded edges inside cabinet
- adjustable feet +20/-45 mm

GENERAL

Description	Kylmävetolaatikosto FT1200x750-GN3
-------------	------------------------------------

DIMENSIONS AND CAPACITY

Item width mm	1200
Item depth mm	650
Item height mm	900
Package volume	0.702 m3
Package dimensions (LxWxH)	130x70x110 cm
Net weight	211.5 kg
Package weight	221.5 kg

TECHNICAL INFORMATION

Connection power kW	0.42
Fuse Size A	10

TECHNICAL INFORMATION

Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Startup current A	3
Protection rating (IP)	43
Type of electrical connection	Plug
Cooling capacity W	570
Type of the refrigerant	R290
Quantity of refrigerant g	85



CODE: MG4321013S-Z25001

Beverage Drawer Classic NT1200-BO2-MBO-BO2 without locks

Technical specifications

GENERAL

Description


Beverage Drawer Classic NT1200-BO2-MBO-BO2 without locks

DIMENSIONS AND CAPACITY

Item width mm	1200
Item depth mm	650
Item height mm	900
Package volume	1.001 m3
Package dimensions (LxWxH)	123x70x110 cm
Net weight	110 kg
Package weight	130 kg

TECHNICAL INFORMATION

Connection power kW	0.42
Fuse Size A	10
Connection voltage V	220-240
Number of phases	1NPE
Frequency Hz	50
Startup current A	3
Protection rating (IP)	IP43
Type of the refrigerant	R290
Quantity of refrigerant g	85

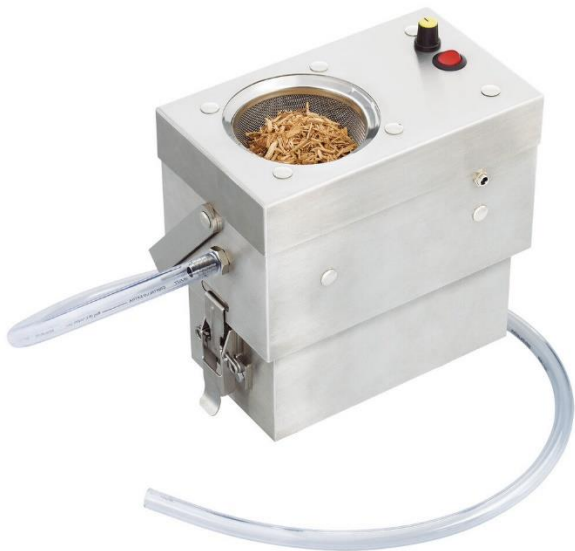

CODE: MG4164000-Z24001

Smoker Metos HotmixPro Smoke

Technical specifications

GENERAL

Description	Smoker Metos HotmixPro Smoke
-------------	------------------------------

DIMENSIONS AND CAPACITY

Item width mm	276
Item depth mm	266
Item height mm	163
Package volume	0.012 m3
Package dimensions (LxWxH)	276x266x163 mm
Net weight	5 kg
Package weight	5.5 kg

TECHNICAL INFORMATION

Connection voltage V	230
Type of electrical connection	Plug



CODE: MG4222020-Z24001

GN container Metos System Rational GN2/1-20 mm, granite enam

Technical specifications

GENERAL

Description

GN container Metos System Rational GN2/1-20 mm, granite enam

DIMENSIONS AND CAPACITY

Item width mm	530
Item depth mm	650
Item height mm	20
Package volume	0.028 m3
Package dimensions (LxWxH)	58x70x7 cm
Net weight	3 kg
Package weight	5 kg



CODE: MG4571382-Z23002

High Speed Combi oven HSO 400

The Metos HSO 400 Turbo boosted high speed oven has an operating mode that simultaneously uses convection, microwave and impingement modes, with temperatures fr...

Full description Technical specifications

The Metos HSO 400 Turbo boosted high speed oven has an operating mode that simultaneously uses convection, microwave and impingement modes, with temperatures from 100°C to 300°C. In Combi Wave mode, the oven can be used as a convection oven with temperatures from 30°C to 300°C, as a microwave oven with power up to 2000W or with a combination of the two cooking methods to achieve results that always exceed expectations.

- Stainless steel
- Base dimensions 426x510 mm
- Cooking chamber dimensions 310x320x180 mm
- 7" LCD colour screen, high definition, capacitive, with "Touch Screen" functions
- Display that can be configured based on the needs of the user, bringing forward the programmes used most
- Automatic cooking with "One Touch" start
- Possibility of preheating the cooking chamber up to 300°C
- Pull-down door with ergonomic handle
- Door open/closed electronic sensor
- Self-diagnosis with smart error viewing
- Max 65°C external temperature on the door panel
- Cooking plate
- Aluminium peel
- OWB - Oracle Washable Box - special removable and washable oven box
- Adesive lining for the inside of the door
- Wi-Fi connection
- Ethernet connection
- USB connection to download HACCP data, update software and upload/download cooking recipes
- Easy external cleaning thanks to the perfectly smooth surfaces and IPX3 protection rating against water spray

GENERAL

Description	High Speed Combi oven HSO 400
-------------	-------------------------------

DIMENSIONS AND CAPACITY

Product capacity	17,9 Lt
Item width mm	467
Item depth mm	510/609
Item height mm	630
Package volume	0.384 m3
Package dimensions (LxWxH)	60x80x80 cm
Net weight	61 kg
Package weight	73 kg

TECHNICAL INFORMATION

Connection power kW	6
Fuse Size A	26
Connection voltage V	400
Number of phases	3NPE
Frequency Hz	50
Protection rating (IP)	X3
Type of electrical connection	Semifixed
Drain diameter	40



CODE: MG4344314-Z24001

Griddle Metos Proxy 74EFTIST 400V3N~

Electric Griddle Metos Proxy 74EFTIST with soft iron smooth plate.

Full description Technical specifications

Electric Griddle Metos Proxy 74EFTIST with soft iron smooth plate.

- Moulded top in AISI304 stainless steel with Scotch Brite finish moulded in a single piece and plates hermetically sealed guarantee easy cleaning and prevent infiltrations of grime and water
- Front control panel made of AISI304 stainless steel with Scotch Brite finish and profile designed for easy cleaning
- External panelling in stainless steel with Scotch Brite finish
- Top versions with construction designed for installation on open neutral bases or bases with doors, on refrigerated bases and on top surfaces.
- Standard h80 mm feet for flat-top installations to facilitate installation, connection and safe maintenance of the equipment
- Upstand splashback with anchor points, supplied as standard.
- One cooking area; Plate with a large cooking surface, 396 x 555 mm
- Large stainless steel grease tray with inspection window to monitor the level of liquids inside
- with IPX4 water-protection rating
- The work surface is slightly inclined to allow it to convey sauces, grease and condiments into the special large-capacity collection drawer
- Thermostatic temperature control, a safety thermostat and indicator light for ignition.
- does not include cord and plug

Accessories (separate price):

- JC joint cover - to prevent infiltration of liquid and grime between the elements
- Neutral open stand M40
- Door for stand M40
- Closing panel for technical cabinet- in-line cooking block

- Closing panel for technical cabinet- opposite cooking block
- Front plinth M40

GENERAL

Description	Griddle Metos Proxy 74EFTIST 400V3N~
-------------	--------------------------------------

DIMENSIONS AND CAPACITY

Item width mm	400
Item depth mm	700
Item height mm	395
Package volume	0.262 m3
Package dimensions (LxWxH)	46x85x67 cm
Net weight	32.5 kg
Package weight	35 kg

TECHNICAL INFORMATION

Connection power kW	3.9
Connection voltage V	400
Number of phases	3NPE
Frequency Hz	50/60
Protection rating (IP)	X4
Type of electrical connection	Semifixed

Semi automatic Metos Nigiri Sushi Robot TSM-09B

Nigiris are a staple in every sushi setting; a moulded piece of rice with either fish, shellfish, egg or vegetables on top. When nigiris are prepared by a fully...

€

Full description Technical specifications

Nigiris are a staple in every sushi setting; a moulded piece of rice with either fish, shellfish, egg or vegetables on top. When nigiris are prepared by a fully automated machine, there is only one rule that applies - the machine moulds the rice and the sushi cook garnishes the dish. The semi-automatic Metos Nigiri Sushi Robot TSM-09B produces beautiful, nicely moulded and homogeneous nigiri sushi pieces by utilizing its precisely designed rice supply function and its unique sushi mould. In addition, the machine portions the ready-made rice pieces onto the dial plate, which is located on top of the turntable. The rice capacity of the machine is 3 kg of cooked rice and it can produce up to 1600 rice pieces per hour, when the size of one piece is 26 or 30 grams. The surface, texture and special shape of the sushi moulds, that should be ordered separately, are designed by examining sushi rice and its consistency and ability to mould. This is to ensure the best possible consistency, no matter if the rice piece is softer or harder. The density of the nigiri pieces can be adjusted between soft, dense and hard by choosing a different setting from the adjustor knob. Furthermore, the machine can produce different sizes of nigiri pieces, depending on the size of the sushi mould (additional accessory). There are seven sushi moulds available; 16, 18, 20, 22, 24, 26, and 30 grams. The machine's automatic stop function stops the turntable when it is filled with six nigiri pieces. In addition, the stop function turns the machine off automatically when the operator opens the front cover. It is easy to clean the machine, as the washable parts can all be removed in 40 seconds. The outside surface is sleek and smooth; thus, it is also easy to keep clean.

- semi-automatic rice supply function
 - automatically shapes the rice pieces and portions them onto the dial plate
 - capacity is 1600 nigiris pieces per hour, when the pieces are 26 or 30 grams
 - automatic stop function that stops the turntable when its filled with six nigiri pieces
 - rice capacity 3 kg
 - sushi moulds (16, 18, 20, 22, 24, 26, 30 grams) available separately
 - easy to clean; washable parts removable in 40 seconds
 - auto stop function for safety when operator opens the front cover
 - frame material protects from impact, dirt, and heat
 - parts are stainless steel SUS304
 - IP67 watertight sensor
 - overheating protector in the motor
- ADDITIONAL ACCESSORIES (order separately):
- sushi mould 16 Metos Nigiri Sushi Robot
 - sushi mould 18 Metos Nigiri Sushi Robot
 - sushi mould 20 Metos Nigiri Sushi Robot
 - sushi mould 22 Metos Nigiri Sushi Robot
 - sushi mould 24 Metos Nigiri Sushi Robot

- sushi mould 26 Metos Nigiri Sushi Robot
- sushi mould 30 Metos Nigiri Sushi Robot
- sushi rice box Blue Box
- Sushi Maki roll trays 3 pcs Metos Blue Box
- lubricating oil Metos Smoothy Neo 5x300 ml

GENERAL


Description	Semi automatic Metos Nigiri Sushi Robot TSM-09B
-------------	---

DIMENSIONS AND CAPACITY

Product capacity	2000 portions/hour
Item width mm	300
Item depth mm	480
Item height mm	450
Package volume	0.093 m3
Package dimensions (LxWxH)	35x53x50 cm
Net weight	18 kg
Package weight	24 kg

TECHNICAL INFORMATION

Connection power kW	0.06
Connection voltage V	220-240
Number of phases	1NPE
Frequency Hz	50/60
Type of electrical connection	Plug

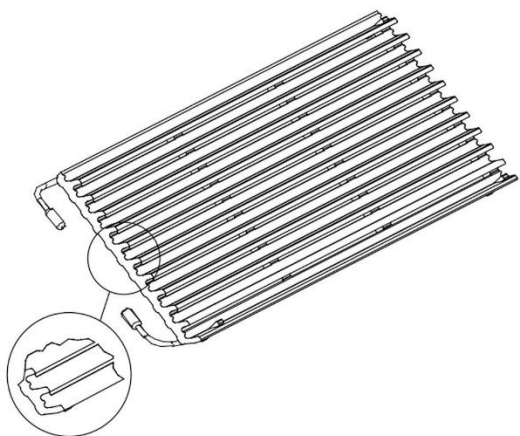

CODE: MG4344276-Z21001

Cast iron grid Diamante 70 GPCG80 OUTLET

Technical specifications Attachments

GENERAL

Description

Cast iron grid Diamante 70 GPCG80 OUTLET

DIMENSIONS AND CAPACITY

Package volume

0.01 m3

Package dimensions (LxWxH)

0x0x0 cm

Net weight

0.8 kg

Package weight

1 kg



CODE: MG4571463-Z25001

Convection oven Metos REC023, 4x2/3 GN

Technical specifications

GENERAL

Description

Convection oven Metos REC023, 4x2/3 GN

DIMENSIONS AND CAPACITY

Product capacity 4xGN2/3-65

Item width mm 640

Item depth mm 565

Item height mm 525

Package volume 0.342 m3

Package dimensions (LxWxH) 72x66x72 cm

Net weight 34 kg

Package weight 42 kg

TECHNICAL INFORMATION

Connection power kW 2.6

Fuse Size A 16

TECHNICAL INFORMATION

Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Protection rating (IP)	X3
Type of electrical connection	Plug
Cold water diam.	3/4"
Drain diameter	30



CODE: MG4000979-Z21001

Kebab-grill GR60E OUTLET

The Metos Kebab Grill GR60E is intended for demanding use in professional kitchens with a capacity of 25 kg. The GR40E model is electrically heated. The grill h...

Full description Technical specifications

The Metos Kebab Grill GR60E is intended for demanding use in professional kitchens with a capacity of 25 kg. The GR40E model is electrically heated. The grill has four, separately adjustable heating elements. The effective heating elements and the heat-storing stone plate, behind the elements, consistently enable the desired uniform cooking result. They also improve the grill's energy efficiency and help minimize potential waste. The spit, located in the centre, is 600 mm tall and it is designed for cooking kebab and gyros meat. The heat elements, equipped with a quick adjustment function, can be easily and one-handedly moved to the desired distance from the meat. The spit can also be operated manually when the pin, which is located at the top, is removed. When designing the grill, special attention has been paid towards the durability of its structure and the ease of cleaning the device. Due to the compact base plate, the motor and its bearing are safe from grease and dust. The large grease collector tank and the drip tray enable quick and simple cleaning routines. The collector tank, the drip tray and the spit are all made of stainless steel. They are also easily removable and dishwasher safe.

- grill designed for Kebab and Gyros meat
- a compact, table-top model
- spit height 600 mm
- meat capacity 25 kg
- four separately adjustable heat elements, adjustment 50% or 100%
- the stone plate behind the heating element reserves heat and provides an even cooking result
- full base width drip tray
- structure of stainless steel

- easily removable and dishwasher safe drip tray, grease collector tank and spit
- standard delivery does not include electric Kebab knife ACCESSORIES:
- electric knife for Kebab and Gyros meat

GENERAL

Description

Kebab-grill GR60E OUTLET

DIMENSIONS AND CAPACITY

Product capacity

25 kg

Item width mm

580

Item depth mm

660

Item height mm

860

Package volume

0.374 m3

Package dimensions (LxWxH)

60x70x89 cm

Net weight

31 kg

Package weight

33 kg

TECHNICAL INFORMATION

Connection power kW

5.8

Connection voltage V

230

Number of phases

1NPE



CODE: MG4343965-Z25001

Griddle smooth Metos Diamante D73/10TSFTEA table top model

Technical specifications

GENERAL

Description

Griddle smooth Metos Diamante D73/10TSFTEA table top model

DIMENSIONS AND CAPACITY

Item width mm	600
Item depth mm	730
Item height mm	250
Package volume	0.196 m3
Package dimensions (LxWxH)	70x80x35 cm
Net weight	61 kg
Package weight	71 kg

TECHNICAL INFORMATION

Connection power kW	5.4
Connection voltage V	400
Number of phases	3NPE
Frequency Hz	50/60

TECHNICAL INFORMATION

Protection rating (IP)	X5
Type of electrical connection	Semifixed



CODE: MG4344084-Z23001

Technical specifications

GENERAL

Description

DIMENSIONS AND CAPACITY

Package volume 0.364 m3

Package dimensions (LxWxH) 50x75x97 cm

Net weight 70 kg

Package weight 80 kg



CODE: MG4216477-Z25001

Food transport trolley Metos Thermobox C180 Washable

Technical specifications

GENERAL

Description

Food transport trolley Metos Thermobox C180 Washable

DIMENSIONS AND CAPACITY

Product capacity	12 x GN 1/1-65
Item width mm	525
Item depth mm	830
Item height mm	1355
Package volume	0.72 m3
Package dimensions (LxWxH)	58x88x141 cm
Net weight	70 kg

DIMENSIONS AND CAPACITY

Package weight	75 kg
----------------	-------

TECHNICAL INFORMATION

Connection power kW	0.245
Fuse Size A	10
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Protection rating (IP)	66
Type of electrical connection	Plug



CODE: MG4310594-Z24001

Deli display Metos newZita Mini 1250 V

Imple rectangular-shaped design, which blends well into different kinds of interiors. Traight glass surfaces of the display minimizes the reflections and mirror...

Full description Technical specifications

Imple rectangular-shaped design, which blends well into different kinds of interiors. Traight glass surfaces of the display minimizes the reflections and mirroring in the display enabling a good view of the displayed goods

- especially suitable for short time storage of e.g. sandwiches, tapas and salads
- open from the service side, which makes the refrigerated display space easily accessible when filling it up with products from the cold cabinets
- products can be kept cold in the stainless steel cold cabinets
- functionable 280 mm work table made of stainless steel on the service side which allows plenty of space to work, e.g. when cutting or packing products
- display area and kick plates made of stainless steel
- front and side panels in grey laminate
- energy efficient LED lights which give light to the exhibited products
- equipped with fan assisted ventilated cooling system and a digital thermostat and thermometer.
- temperature range for the food exhibited in the display is -1°C...+5°C, when the ambient temperature is +25°C and humidity 60% R.H.(climate/temperature class 3M1)
- frame structure made of polyurethane, ensuring good insulation
- self-contained

Accessories:

- wide range of other laminate colours
- cashier and corner units
- central cooling
- sliding plexi doors on service side
- neutral glass shelf inside display
- cutting and balance boards
- knife holder

GENERAL

Description	Deli display Metos newZita Mini 1250 V
-------------	--

DIMENSIONS AND CAPACITY

Product capacity	286 litre
Item width mm	1330
Item depth mm	948
Item height mm	1190/1210
Package volume	1.529 m3
Package dimensions (LxWxH)	133x95x121 cm
Net weight	140 kg
Package weight	232 kg

TECHNICAL INFORMATION

Connection power kW	0.45
Fuse Size A	16
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	50
Drain diameter	32
Cooling capacity W	429
Type of the refrigerant	R290
Quantity of refrigerant g	120
Sound level dB	60



CODE: MG4310693-Z24001

Multideck open display Metos MS09PIM1 LED

~~€6,700.00~~ €2,230.00

IN STOCK

Add to cart

☐ Compare

Technical specifications

GENERAL

Description

Multideck open display Metos MS09PIM1 LED

DIMENSIONS AND CAPACITY

Product capacity

342 liters/ refr.area 1,51m²

Item width mm

1018

Item depth mm

685

Item height mm

2000

Package volume

1.892 m³

Package dimensions (LxWxH)

110x80x215 cm

Net weight

205 kg

DIMENSIONS AND CAPACITY

Package weight	230 kg
----------------	--------

TECHNICAL INFORMATION

Connection power kW	1.478
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of electrical connection	Plug
Type of the refrigerant	R290



CODE: MG4310682-Z23001

Technical specifications

GENERAL

Description

DIMENSIONS AND CAPACITY

Package volume	2.494 m3
Package dimensions (LxWxH)	145x80x215 cm
Net weight	295 kg
Package weight	320 kg



CODE: MG4181048-Z23001

Provides even heat distribution. Sturdy aluminium housing

Full description Technical specifications

Provides even heat distribution. Sturdy aluminium housing

- infrared heating elements
- reinforced wire guard for operator safety
- heavy duty insulation
- shatter resistant (coated) lamps à 60 W
- remote control including toggle and infinite switch, connected to unit with ~0,9 m conduit
- no cord & plug

GENERAL

Description

DIMENSIONS AND CAPACITY

Package volume	0.013 m3
Package dimensions (LxWxH)	47x39x7 cm
Net weight	5 kg
Package weight	7.51 kg



CODE: MG4550162-Z24001

Wall bracket Metos 152-3,for 3 cutleryboxes

Wall bracket in stainless steel for 3 cutlery boxes. Length 500 mm.

Full description Technical specifications

Wall bracket in stainless steel for 3 cutlery boxes. Length 500 mm.

GENERAL

Description

Wall bracket Metos 152-3,for 3 cutleryboxes

DIMENSIONS AND CAPACITY

Item width mm	500
Item depth mm	50
Item height mm	130
Package volume	0.004 m3
Package dimensions (LxWxH)	50x13x6 cm
Net weight	1.2 kg
Package weight	1.2 kg



CODE: MG4554716-Z24001

Lid for Metos waste trolley WAT-60 Grey

Grey plastic cover for waste trolley WAT-60.

Full description Technical specifications

Grey plastic cover for waste trolley WAT-60.

GENERAL

Description

Lid for Metos waste trolley WAT-60
Grey

DIMENSIONS AND CAPACITY

Item width mm

285

Item depth mm

560

Item height mm

48

Package volume

0.014 m3

Package dimensions (LxWxH)

30x58x8 cm

Net weight

0.4 kg

Package weight

0.4 kg



CODE: MG4554714-Z24001

Lid for Metos waste trolley WAT-60 Blue

Blue plastic cover for waste trolley WAT-60.

Full description Technical specifications
Blue plastic cover for waste trolley WAT-60.

GENERAL

Description

Lid for Metos waste trolley WAT-60
Blue

DIMENSIONS AND CAPACITY

Item width mm

285

Item depth mm

560

Item height mm

48

Package volume

0.014 m3

Package dimensions (LxWxH)

30x58x8 cm

Net weight

0.4 kg

Package weight

0.4 kg



CODE: MG4554712-Z24001

Lid for Metos waste trolley WAT-60 Green

Full description Technical specifications

Green plastic cover for waste trolley WAT-60.

GENERAL

Description

Lid for Metos waste trolley WAT-60
Green

DIMENSIONS AND CAPACITY

Item width mm

285

Item depth mm

560

Item height mm

48

Package volume

0.014 m3

Package dimensions (LxWxH)

30x58x8 cm

Net weight

0.4 kg

Package weight

0.4 kg



CODE: MG4305026-Z24001

Hand-out Shelf, removable Metos Proff HSR-800

Construction of stainless steel and tempered glass. Glasses are easy to remove and clean

Full description Technical specifications

Construction of stainless steel and tempered glass. Glasses are easy to remove and clean
- removable, can be installed afterwards to Proff equipment

GENERAL

Description

Hand-out Shelf, removable Metos Proff HSR-800

DIMENSIONS AND CAPACITY

Item width mm	795
Item depth mm	210
Item height mm	300
Package volume	0.06 m3
Package dimensions (LxWxH)	81.5x23x32 cm
Net weight	11 kg
Package weight	11 kg



CODE: MG4554718-Z24001

Lid for Metos waste trolley WAT-60 Red

Red plastic cover for waste trolley WAT-60.

Full description Technical specifications

Red plastic cover for waste trolley WAT-60.

GENERAL

Description

Lid for Metos waste trolley WAT-60
Red

DIMENSIONS AND CAPACITY

Item width mm

285

Item depth mm

560

Item height mm

48

Package volume

0.014 m3

Package dimensions (LxWxH)

30x58x8 cm

Net weight

0.4 kg

Package weight

0.4 kg



CODE: MG4181190-Z24001

Heat emitter Metos GRAHL-18D with two lamps

Provides even heat distribution. Sturdy aluminium housing

Full description Technical specifications

Provides even heat distribution. Sturdy aluminium housing

- infrared heating elements
- reinforced wire guard for operator safety
- heavy duty insulation
- shatter resistant (coated) two lamps à 60 W
- one switch for light and heat
- no cord <(>&<)> plug

GENERAL

Description

Heat emitter Metos GRAHL-18D with two lamps

DIMENSIONS AND CAPACITY

Product capacity	1 x GN1/1
Item width mm	457
Item depth mm	381
Item height mm	64
Package volume	0.013 m3
Package dimensions (LxWxH)	47x39x7 cm

DIMENSIONS AND CAPACITY

Net weight	5 kg
------------	------

Package weight	6 kg
----------------	------

TECHNICAL INFORMATION

Connection power kW	0.82
---------------------	------

Fuse Size A	6
-------------	---

Connection voltage V	230
----------------------	-----

Number of phases	1NPE
------------------	------

Frequency Hz	50
--------------	----

Type of electrical connection	Semifixed
-------------------------------	-----------

Electrical conn. height mm	25
----------------------------	----



CODE: MG4231797-Z23001

Lamp Focus MO Black RKS LED OUTLET

Black shade. Anodised aluminium, galvanised steel

Full description Technical specifications

Black shade. Anodised aluminium, galvanised steel

- shade: H 250mm / Ø 200mm

- LED light

- with cord

GENERAL

Description

Lamp Focus MO Black RKS LED OUTLET

DIMENSIONS AND CAPACITY

Package volume

0.016 m3

Package dimensions (LxWxH)

20x20x40 cm

Net weight

1.5 kg

Package weight

1.9 kg



CODE: MG4181054-Z24001

Heat emitter Metos GRAHL-60D CE EX RMB-7NE-CE with five lamp

Provides even heat distribution. Sturdy aluminium housing

~~€2,139.00~~ €949.00

IN STOCK

Add to cart

☐ Compare

Full description Technical specifications

Provides even heat distribution. Sturdy aluminium housing

- infrared heating elements
- reinforced wire guard for operator safety
- heavy duty insulation
- shatter resistant (coated) five lamps á 60 W
- remote control including toggle and infinite switch, connected to unit with ~0,9 m conduit
- no cord & plug

GENERAL

Description

Heat emitter Metos GRAHL-60D CE EX
RMB-7NE-CE with five lamp

DIMENSIONS AND CAPACITY

Product capacity	4 x GN1/1
Item width mm	1524
Item depth mm	381
Item height mm	64
Package volume	0.01 m3
Package dimensions (LxWxH)	0x0x0 cm
Net weight	16 kg

DIMENSIONS AND CAPACITY

Package weight	17 kg
----------------	-------

TECHNICAL INFORMATION

Connection power kW	3.1
---------------------	-----

Fuse Size A	16
-------------	----

Connection voltage V	230
----------------------	-----

Number of phases	1NPE
------------------	------

Frequency Hz	50
--------------	----

Type of electrical connection	Semifixed
-------------------------------	-----------

Electrical conn. height mm	25
----------------------------	----



CODE: MG4231721-Z23001

Heat lamp Trattoria 1223 Alu 250W OUTLET

Aluminium. No lift mechanism

Full description Technical specifications

Aluminium. No lift mechanism

- shade: H 330mm / Ø 280mm

- infrared light: white light 250W

GENERAL

Description

Heat lamp Trattoria 1223 Alu 250W OUTLET

DIMENSIONS AND CAPACITY

Package volume

0.016 m3

Package dimensions (LxWxH)

33x33x40 cm

Net weight

1.5 kg

Package weight

2 kg



CODE: MG4208497-Z24002

Biowastetrolley 2 x 30l Metos LBJV-2, 2x240mm

Technical specifications

GENERAL

Description

Biowastetrolley 2 x 30l Metos LBJV-2, 2x240mm

DIMENSIONS AND CAPACITY

Product capacity

2 x 30 litres

Item width mm

800

Item depth mm

580

Item height mm

850

Package volume

0.643 m3

Package dimensions (LxWxH)

90x68x105 cm

Net weight

34 kg

Package weight

34 kg



CODE: MG4181123-Z24001

Heat lamp Metos Classic 1250-K with 250W burner

Technical specifications

GENERAL

Description

Heat lamp Metos Classic 1250-K with 250W burner

DIMENSIONS AND CAPACITY

Item width mm

Ø180

Item height mm

220

Package volume

0.016 m3

Package dimensions (LxWxH)

20x20x40 cm

Net weight

1.5 kg

Package weight

1.9 kg

TECHNICAL INFORMATION

Connection power kW

0.25

Connection voltage V

230

Number of phases

1NPE

Electrical cable length mm

2000

Type of electrical connection

Semifixed



CODE: MG4208063-Z24001

Service trolley Metos SET-75 WD

Technical specifications

GENERAL

Description

Service trolley Metos SET-75 WD

DIMENSIONS AND CAPACITY

Product capacity

Taso 550 x 650 mm

Item width mm

573/599

Item depth mm

740/946

Item height mm

880+18/-25

Package volume

0.304 m3

Package dimensions (LxWxH)

60x60x84.5 cm

Net weight

18 kg

Package weight

18 kg



CODE: MG4554088-Z24002

Basket trolley Metos BAT-4

Technical specifications

GENERAL

Description

Basket trolley Metos BAT-4

DIMENSIONS AND CAPACITY

Product capacity	2 baskets
Item width mm	590
Item depth mm	590
Item height mm	832
Package volume	0.341 m3
Package dimensions (LxWxH)	64x64x83.2 cm
Net weight	7.9 kg
Package weight	7.9 kg



CODE: MG4554098-Z24001

Tray dispenser trolley Metos TDT

Technical specifications

GENERAL

Description

Tray dispenser trolley Metos TDT

DIMENSIONS AND CAPACITY

Item width mm

400

Item depth mm

645

Item height mm

975(1270)

Package volume

0.294 m3

Package dimensions (LxWxH)

44x68.5x97.5 cm

Net weight

30 kg

Package weight

30.5 kg



CODE: MG4203900-Z24001

Plate Dispenser Metos Proff PD 2x270

Technical specifications

GENERAL

Description

Plate Dispenser Metos Proff PD 2x270

DIMENSIONS AND CAPACITY

Product capacity	appr. 130 plates
Item width mm	400
Item depth mm	650
Item height mm	900
Package volume	0.347 m3
Package dimensions (LxWxH)	45x70x110 cm
Net weight	45 kg
Package weight	50 kg



CODE: MG4248091-Z23001

Technical specifications

GENERAL

Description

DIMENSIONS AND CAPACITY

Package volume	0.004 m3
Package dimensions (LxWxH)	20x16x11 cm
Net weight	0.3 kg
Package weight	0.4 kg



CODE: MG4135418-Z24001

Meat mincer 70mm Metos Bear 20L (20-80L)

Meat mincer. Mincing capacity 150 kg / h

Full description Technical specifications

Meat mincer. Mincing capacity 150 kg / h

- 4,5 mm sieve plate \varnothing 70 mm
- metal alloy construction
- feeding tray
- pusher
- stainless steel sieve plate
- stainless steel cutting blade Extra equipment:
- sieve plates 2, 3, 6, 8 and 13 mm
- intermediate bearing no. 4
- sausage tube

GENERAL

Description

Meat mincer 70mm Metos Bear 20L (20-80L)

DIMENSIONS AND CAPACITY

Product capacity	150 kg/hour
Item width mm	200
Item depth mm	250
Item height mm	150
Package volume	0.012 m3
Package dimensions (LxWxH)	25x27x18 cm
Net weight	1.6 kg
Package weight	2.1 kg



CODE: MG4163600-ZVK23

Temperature consistency of ± 0.1 °C. Safety protection grid prevents the vacuum pouch from touching moving and heated parts.

Full description Technical specifications

Temperature consistency of ± 0.1 °C. Safety protection grid prevents the vacuum pouch from touching moving and heated parts.

- circulating pump ensures optimal temperature stability and water distribution throughout the bath
- can be mounted on any vessel or cooking pot by simply using its attachment clamp
- integrated timer allows for easy monitoring of the elapsed or remaining cooking time.
- Smudge-Proof Stainless Steel Hood
- Low-Level Water Alarm
- Vapor Barrier Protection

GENERAL

Description

DIMENSIONS AND CAPACITY

Package volume	0.014 m3
Package dimensions (LxWxH)	20x17x40 cm
Net weight	5.1 kg
Package weight	6 kg



CODE: MG4136301-Z16001

Water softener system Metos E-10/SS-10 OUTLET

€

Technical specifications

GENERAL

Description

Water softener system Metos E-10/SS-10
OUTLET

DIMENSIONS AND CAPACITY

Package volume

0

Package dimensions (LxWxH)

0x0x0

Net weight

4.5 kg

Package weight

5 kg



CODE: MG4319028-Z24001

Ceramic Plate Metos Nova CPL 800 H-750

Technical specifications

GENERAL

Description

Ceramic Plate Metos Nova CPL 800 H-750

DIMENSIONS AND CAPACITY

Product capacity

2 GN1/1

Item width mm

800

Item depth mm

650/1150

Item height mm

750/1130

Package volume

1.191 m3

Package dimensions (LxWxH)

97x93x132 cm

Net weight

90 kg

Package weight

90 kg

TECHNICAL INFORMATION

Connection power kW

1.2

TECHNICAL INFORMATION

Fuse Size A	16
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50/60
Startup current A	5.3
Protection rating (IP)	43
Type of electrical connection	Plug



CODE: MG4245129-Z24001

Cold Surface Built-In Metos UCP5-Flush

Efficient cooling system, frosted surface with temperature -5°C. Built-in model (flush with the table top)

Full description Technical specifications

Efficient cooling system, frosted surface with temperature -5°C. Built-in model (flush with the table top)

- easy-to-clean digital controller with adjustable temperature

- drain valve (internal thread G1/2)

GENERAL

Description	Cold Surface Built-In Metos UCP5-Flush
-------------	--

DIMENSIONS AND CAPACITY

Product capacity	5 x GN 1/1
Item width mm	1650
Item depth mm	600
Item height mm	475
Package volume	0.777 m3
Package dimensions (LxWxH)	185x70x60 cm
Net weight	32 kg
Package weight	35 kg

TECHNICAL INFORMATION

Connection power kW	0.59
Fuse Size A	2.6
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of the refrigerant	R290



CODE: MG4262143-Z24001

Tray Metos Burlodge grey 530 * 325 mm

The material is glass fibre reinforced polystyrene which is approved for contact with food stuff. The weight of one tray is 805 gram. Height when stacking: 55 m...

Full description Technical specifications

The material is glass fibre reinforced polystyrene which is approved for contact with food stuff. The weight of one tray is 805 gram. Height when stacking: 55 mm (10 pcs) + 7 mm per additional tray

GENERAL

Description

Tray Metos Burlodge grey 530 * 325 mm

DIMENSIONS AND CAPACITY

Item width mm	325
Item depth mm	530
Item height mm	14
Package volume	0.01 m3
Package dimensions (LxWxH)	0x0x0
Net weight	0.805 kg
Package weight	0.805 kg



CODE: MG4305152-Z24001

Cold serving trolley Metos Luna CB 1200x650x750

The cold serving trolley Metos Luna CB is self-service unit equipped with wheels. In the standard model, two of the wheels can be locked. The food distribution ...

Full description Technical specifications

The cold serving trolley Metos Luna CB is self-service unit equipped with wheels. In the standard model, two of the wheels can be locked. The food distribution units can be used either alone or they can be used to build a self-service line suitable for the customer's individual needs. At its best, the flexibility of the model comes out in customer-specific solutions, for which the modularity gives numerous possibilities.

The cold serving trolley has S/S tray slides with a width of 250mm. The upper part is stainless steel with LED light, which illuminates the food from above. The depth of the cold basin is 160 mm. The rounded inner corners of the GN-1/1 dimensioned basins make cleaning easier. The high-pressure laminate liners are standard in gray F7912 color. A connecting piece with which the units can be connected to each other is included in the delivery.

- Seamless cover and rounded inner corners of the basin, depth 160mm
- Levelled tray levels 250mm, both sides of the unit
- Durable stainless steel frame, lining plates high-pressure laminate, Standard color: gray F7912
- The edge band is neutral gray color
- Light-running wheels, two of which are lockable, standard diameter 125mm
- The furniture has doors for easy access to the switches
- Drained basin; basin-specific drain valve
- Connecting piece for connecting units together

- Stainless steel top shelf, with a LED light underneath
- Tempered glass sneeze guard on both sides

GENERAL

Description	Cold serving trolley Metos Luna CB 1200x650x750
-------------	---

DIMENSIONS AND CAPACITY

Product capacity	3xGN1/1
Item width mm	1200
Item depth mm	650/1150
Item height mm	750/1080
Package volume	0.963 m3
Package dimensions (LxWxH)	125x70x110 cm
Net weight	95 kg
Package weight	105 kg

TECHNICAL INFORMATION

Connection power kW	0.8
Fuse Size A	16
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Startup current A	3.82
Protection rating (IP)	43
Type of the refrigerant	R290
Quantity of refrigerant g	90



CODE: MG4245130-Z24001

Cold Surface Built-In Metos UCP6-Flush

Efficient cooling system, frosted surface with temperature -5°C. Built-in model (flush with the table top)

Full description Technical specifications

Efficient cooling system, frosted surface with temperature -5°C. Built-in model (flush with the table top)

- easy-to-clean digital controller with adjustable temperature
- drain valve (internal thread G1/2)

GENERAL

Description	Cold Surface Built-In Metos UCP6-Flush
-------------	--

DIMENSIONS AND CAPACITY

Product capacity	6 x GN 1/1
Item width mm	2000
Item depth mm	600
Item height mm	475
Package volume	0.924 m3
Package dimensions (LxWxH)	220x70x60 cm
Net weight	40 kg
Package weight	42 kg

TECHNICAL INFORMATION

Connection power kW	0.661
Fuse Size A	3.1
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50
Type of the refrigerant	R290



CODE: MG4231703G-Z24001

Cold plate Metos JH2100K GN3/1 Black-grey

Cold Plate Metos JH 2100 GN3/1 drop-in plate for a flexible serving line. Temperature area -5 °C... +15 °C for serving different kinds of products (+22°C ambient temperature).

Full description Technical specifications

Cold Plate Metos JH 2100 GN3/1 drop-in plate for a flexible serving line. Temperature area -5 °C... +15 °C for serving different kinds of products (+22°C ambient temperature). The top material is 9,5 mm CNS aluminium.

Delivery includes:

- 1 m control cable
- 2 m power supply
- Gorilla glass top: RAL7021 black-gray

Accessories (to be ordered separately):

- Gorilla glass top: RAL7016 anthracite, RAL7021 black-gray, RAL9004 black, RAL9010 white.
- 4 mm glass top: RAL1007, RAL1023, RAL3000, RAL5001, RAL5005, RAL6005, RAL6015, RAL6033, RAL7000, RAL7009, RAL7011, RAL7016, RAL7021, RAL7031, RAL7035, RAL9004, RAL9010

GENERAL

Description

Cold plate Metos JH2100K GN3/1 Black-grey

DIMENSIONS AND CAPACITY

Item width mm	990
Item depth mm	530
Item height mm	230

DIMENSIONS AND CAPACITY

Package volume	0.204 m ³
Package dimensions (LxWxH)	108x63x30 cm
Net weight	35 kg
Package weight	38 kg

TECHNICAL INFORMATION

Connection power kW	2.34
Connection voltage V	240
Number of phases	1NPE
Frequency Hz	50/60
Type of the refrigerant	R600a



CODE: MG4305156-Z24001

Bain Marie trolley Metos Luna BM 800x650x750

The Bain Marie trolley Metos Luna BM is self-service unit equipped with wheels. In the standard model, two of the four wheels can be locked. The food distribut...

Full description Technical specifications

The Bain Marie trolley Metos Luna BM is self-service unit equipped with wheels. In the standard model, two of the four wheels can be locked. The food distribution units can be used either alone or they can be used to build a self-service line suitable for the customer's individual needs. At its best, the flexibility of the model comes out in customer-specific solutions, for which the modularity gives numerous possibilities.

The Bain Marie trolley has S/S tray slides with a width of 250mm. The upper part is stainless steel with LED light, which illuminates the food from above. The depth of the bain marie is 160 mm and maximum temperature is 90°C. The rounded inner corners of the GN-1/1 dimensioned basins make cleaning easier. The high-pressure laminate liners are standard in gray F7912 color. A connecting piece with which the units can be connected to each other is included in the delivery.

- Seamless cover and rounded inner corners of the basin, depth 160mm
- maximum temperature of the bain marie 90°C
- Levelled tray levels 250mm, both sides of the unit
- Durable stainless steel frame, lining plates high-pressure laminate, Standard color: gray F7912
- The edge band is neutral gray color
- Light-running wheels, two of which are lockable, standard diameter 125mm
- The furniture has doors for easy access to the switches
- Drained basin; basin-specific drain valve

- Connecting piece for connecting units together
- Stainless steel top shelf, with a LED light underneath
- Tempered glass sneeze guard on both sides

GENERAL

Description

Bain Marie trolley Metos Luna BM 800x650x750

DIMENSIONS AND CAPACITY

Product capacity 2xGN1/1

Item width mm 800

Item depth mm 650/1150

Item height mm 750/1280

Package volume 0.655 m³

Package dimensions (LxWxH) 85x70x110 cm

Net weight 85 kg

Package weight 95 kg

TECHNICAL INFORMATION

Connection power kW 1.12

Fuse Size A 16

Connection voltage V 230

Number of phases 1NPE

Frequency Hz 50/60

Startup current A 4.86

Protection rating (IP) 43



CODE: MG4231787-Z20001

Combi plate GN1/1, beech stained, special OUTLET

Metos Hot<(>&<)>Cold Combi plate GN1/1 with wooden frame on counter model for a flexible serving line. Flexible temperature area -5 °C - +140 °C...

Full description Technical specifications

Metos Hot<(>&<)>Cold Combi plate GN1/1 with wooden frame on counter model for a flexible serving line. Flexible temperature area -5 °C - +140 °C for serving different kinds of products (at +24°C ambient temperature.) Temperature area can transform itself in approximately 10 minutes from cold to warm and in 30 minutes from warm to cold.

Delivery includes:

- 2 m power cord
- frame: beech stained dark
- black Gorilla glass top RAL9004, factory installed
- custom made control panel on narrow side

GENERAL

Description	Combi plate GN1/1, beech stained, special OUTLET
-------------	--

DIMENSIONS AND CAPACITY

Item width mm	580
Item depth mm	405
Item height mm	153
Package volume	0.086 m3
Package dimensions (LxWxH)	62x46x30 cm
Net weight	0.01 kg
Package weight	0.02 kg

TECHNICAL INFORMATION

Connection power kW	0.85
---------------------	------

TECHNICAL INFORMATION

Fuse Size A	16
Connection voltage V	240
Number of phases	1NPE
Frequency Hz	50/60
Type of the refrigerant	R600a



CODE: MG4181199-Z23001

Heat emitter GRAHL-72D with 2 switches OUTLET

Provides even heat distribution. Sturdy aluminium housing

Full description Technical specifications

Provides even heat distribution. Sturdy aluminium housing

- infrared heating elements
- reinforced wire guard for operator safety
- heavy duty insulation
- shatter resistant (coated) five lamps à 60 W
- separate switches for light and heat
- no cord & plug
- possible to be connected to the remote control box (RMB) later on

GENERAL

Description	Heat emitter GRAHL-72D with 2 switches OUTLET
-------------	---

DIMENSIONS AND CAPACITY

Product capacity	4 GN1/1
Item width mm	1829
Item depth mm	381

DIMENSIONS AND CAPACITY

Item height mm	64
Package volume	0.052 m3
Package dimensions (LxWxH)	190x39x7 cm
Net weight	18 kg
Package weight	19 kg

TECHNICAL INFORMATION

Connection power kW	4.1
Fuse Size A	10
Connection voltage V	230
Number of phases	1N
Frequency Hz	50
Type of electrical connection	Semifixed
Electrical conn. height mm	25



CODE: MG4138644-Z21001

Bain Marie D-I BM 450

Technical specifications

GENERAL

Description	Bain Marie D-I BM 450
-------------	-----------------------

DIMENSIONS AND CAPACITY

Product capacity	1 GN 1/1
Item width mm	460
Item depth mm	650
Item height mm	355
Package volume	0.383 m3
Package dimensions (LxWxH)	60x75x85 cm
Net weight	12 kg
Package weight	12 kg

TECHNICAL INFORMATION

Connection power kW	0.55
Fuse Size A	16
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50/60
Startup current A	2.4
Protection rating (IP)	43
Type of electrical connection	Plug
Drain diameter	21/16



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mhi@nt-rt.ru || сайт: <http://metos.nt-rt.ru/>